


Certified LED Lights®
STANDARD

PENDING

Photocell Standard
APPLICATION

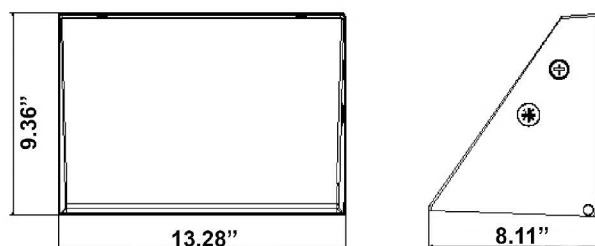
LED architectural full cutoff wall packs provide zero uplight and low glare at high angles. It is CCT selectable 3K, 4K, 5K and wattage selectable 40W, 60W, 80W. It is designed with the most powerful and efficient heat sink, die-casting aluminum alloy housing, and anti-corrosion painting. This LED pack light can work up to 50,000 hours, replacing traditional MH / HPS fixtures 175W-400W and saving up to 80% energy. Standard with photocell pre-installed.

FEATURES

- * CCT Selectable: 3K, 4K 5K
- * Wattage selectable 40W, 60W, 80W
- * Lumileds SMD 2835 LED
- * Long-life LEDs provide 50,000 hours of operation
- * Universal 120-277 AC voltage (50-60Hz) is standard
- * Power factor > 0.90
- * 0-10V dimming capability is standard
- * Color rendering index > 80
- * Die cast aluminum housing with durable, dark bronze, powder coat paint
- * Durable, UV-resistant polycarbonate
- * Standard with photocell pre-installed
- * Operating temperature: -40 F - 122 F
- * Easy installation in new construction or retrofit

ORDERING INFORMATION
WARRANTY & LISTINGS

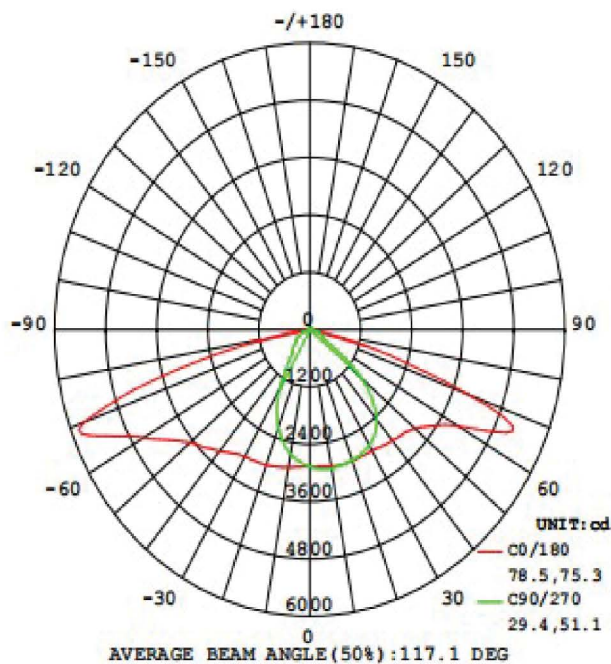
- * UL listed
- * DLC premium pending
- * IP65 rated
- * 5-year warranty on all electronics and housing

DIMENSIONS

OPTION (SOLD SEPARATELY)

- * Microwave motion sensor : CLL-LHB5-MS

PART #	CCT Color Temp	Lumen/watt	Selectable Wattage	Lumens
CLL-FWP06L-80W-CCT-PC-SB	3K, 4K, 5K	137-152	40, 60, 80	5,480 / 8,400 / 12,160

PHOTOMETRIC DATA

INTENSITY DISTRIBUTION DIAGRAM
IN C PLANSMAX INTENSITY CONE SURFACE
DISTRIBUTION DIAGRAM